

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 931 490 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
29.08.2001 Bulletin 2001/35

(51) Int Cl.7: **A47J 31/06**

(21) Application number: 99500011.4

(22) Date of filing: 26.01.1999

### (54) Coffee maker filter holder system

Haltevorrichtung für einen Filter einer Kaffeemaschine

Dispositif pour tenir un filtre dans une machine à café

(84) Designated Contracting States:  
**DE FR GB IT PT**

(30) Priority: 27.01.1998 ES 9800142

(43) Date of publication of application:  
28.07.1999 Bulletin 1999/30

(73) Proprietor: **OFICINA DE INVESTIGACION  
AGRUPADA, S.A.**  
20600 Eibar (Guipuzcoa) (ES)

(72) Inventor: **Causo Fuentes, Francisco**  
Matxaria, 1 -10, 20600 Eibar (Guipuzcoa) (ES)

(74) Representative: **Carpintero Lopez, Francisco**  
**HERRERO & ASOCIADOS, S.L.**  
Alcalá, 35  
28014 Madrid (ES)

(56) References cited:  
**EP-A- 0 555 775** **WO-A-96/27316**  
**FR-A- 1 601 828** **FR-A- 2 245 318**

**EP 0 931 490 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### SPECIFICATION

#### OBJECT OF THE INVENTION

[0001] The present invention relates to a new coffee maker filter holder system, applicable to so-called "espresso" coffee makers that work with a single measure of coffee, specifically coffee makers in which said coffee measure is housed within a filter paper wrap and is designed to be arranged on a filter holder in order for the necessary quantity of water required for the infusion to be obtained to pass therethrough.

[0002] The object of the invention is to provide a filter holder system comprising a small number of parts that are easy to assemble and take apart, which moreover allows the filter holder to be sealed to the reservoir during the infusion step, in order for the full measure of hot water to pass through the coffee.

#### BACKGROUND OF THE INVENTION

[0003] Coffee makers of this kind generally comprise a water supplying reservoir, fitted with heating means for the appropriate temperature level to be attained, the bottom of such reservoir being provided with an extension allowing hot water out towards the filter paper wrap containing the coffee measure.

[0004] This measure of coffee, with its filter paper wrap, is arranged on a filter holder that must be capable of travelling vertically, in order to receive the coffee measure in its lowermost position, whereas in its uppermost position this assembly is coupled to the reservoir water outlet extension, just before the coffee infusion is distributed.

[0005] The filter holder in such coffee makers is thus generally mounted on a fixed support to the bottom of the reservoir, fitted with means that enable the filter holder to travel vertically relative to the hot water outlet extension, which travel takes place by actuating an outer grip or handle which, upon turning, drives a cam that causes the filter holder to rise, until it adapts to the hot water outlet extension, whereas when actuated in the opposite direction, return springs cause the filter holder to move down to the lowermost position for the used coffee measure to be removed and replaced with a new one. The fixed support is fitted with vertical slides guiding the filter holder as it travels up and down.

[0006] As we have seen, this solution requires a large number of parts to operate and is therefore complicated to assemble, take apart or repair, and indeed also poses a sealing problem relative to said reservoir water outlet extension. These sealing problems lie in the very means that raise and lower the filter holder, specifically in the use of cams, slides and springs that cannot ensure a perfectly horizontal travel of the filter holder and therefore a perfect seal between the same and the reservoir

water outlet extension. Document EP-A-555775 discloses a coffee maker filter holder system according to the preamble of claim 1.

[0007] Document FR-A-2245318 discloses another coffee maker filter holding system, comprising a filter holder capable of travelling vertically on a fixed support which is fitted with a plurality of equiangularly arranged bolts with associated respective spiral slots operatively established on the wall of the fixed support.

[0008] In document FR-A-2245318 the filter holder is the typical cup which is filled with milled coffee, whereas the system of the present invention is for coffee makers that work with a measure of coffee encased in sachets.

#### DESCRIPTION OF THE INVENTION

[0009] The filter holder system subject of the invention fully solves the problems described above in that it allows the filter holder to be sealed to the lower reservoir water outlet extension, whereby it is absolutely impossible for perimetral spillage to occur beyond the coffee measure, detrimental to the infusion quality. This is all achieved using a limited number of parts, which means that assembling, taking apart and maintaining the system is quite simple.

[0010] More specifically, the system disclosed herein is based upon the provision on the inner filter holder surface of several bolts designed to play within respective slots of the fixed support, which slots are spiral in shape and therefore when the filter holder bolts reach the lowermost position within said slots, the filter holder also takes up a lowermost position in which the coffee measure may be easily replaced, whereas when the filter holder turns, manually driven through a classic handle, its bolts rise along the ramps defined by the fixed support slots, up to an uppermost position in which the circumference of the filter adapts perfectly to the mouth of the water-supplying reservoir, preferably with a gasket in between, which ensures a perfect sealing in order to avoid unwanted liquid leakage.

[0011] In accordance with another characteristic of the invention, said spiral fixed support slots are designed to have a direction change close to their top end, defining an almost horizontal terminal sector which avoids the tendency of the filter holder to disengage itself in such a limiting position.

[0012] Said filter holder bolts may lean directly on the spiral fixed support slots or do so through bushes or sheaves enhancing the rolling conditions.

[0013] In practice, the filter may be directly adapted to the water outlet mouth, as described above, or be so adapted with a middle ring in between, duly established on the fixed support, said ring being sealed to said reservoir mouth with a gasket in between, whereas the circumference of the filter holding the coffee measure is coupled to said ring with the assistance of another gasket.

[0014] The filter holder of the invention has a large

side window for the measure to be inserted and removed and a number of elongate windows enabling any type of measure to be used, indeed those in which the filter paper is square in shape, for in that case the corners of the filter paper shall project from the filter holder through said windows.

[0015] A housing is in any event designed to be arranged around the slide part, screwed or otherwise conventionally fixed to the latter and acting as a guard and ornamental cap therefor.

[0016] The provision of a measure-removing device has also been provided in order to avoid that when the coffee infusion is ready and the filter holder is taken to the lowermost or removal position, the measure may stick to the middle ring on the fixed support, making it difficult to remove.

[0017] The removing device consists of a finger or thruster, provided with an enlarged end or head, and a spring acting on said head, which assembly is fitted in a central bore provided in the middle fixed support ring in such a way that, by spring action, the head of the removing finger will act on the coffee measure, pushing it down and preventing it from sticking to the middle ring. Obviously, upon acting on the filter holder to take it to the top position, the measure itself pushes the ejecting finger against the spring action, causing the same to retract.

## DESCRIPTION OF THE DRAWINGS

[0018] In order to provide a fuller description and contribute to the complete understanding of the characteristics of this invention, in accordance with a preferred practical embodiment thereof, a set of drawings is attached to the specification as an integral part thereof which, while purely illustrative and not fully comprehensive, shows the following:

[0019] Figure 1.- Is an exploded side elevation view of a coffee maker provided with the filter holder system subject of the present invention.

[0020] Figure 2.- Is a close sectional view of the assembly represented in the preceding figure, along line A-B of said figure.

[0021] Figure 3.- Is, finally, an exploded perspective view of the assembly represented in the preceding figures.

## PREFERRED EMBODIMENT OF THE INVENTION

[0022] With reference to these figures, the system disclosed herein can be seen to apply to coffee makers in which a hot water reservoir, which is not shown, ends in a bottom extension (1), to which extension or the reservoir proper a fixed support (2) may be coupled, which in the practical embodiment represented in the figures has an inner ring (3) which, with the assistance of a gasket (4), allows said extension (1) to be sealed to the outlet (5), thereby for water to pass through the axial bore (6)

of the ring (3) and reach the filter (7) holding the coffee measure (8), duly established within a filter holder (9), provided with a manual drive handle (10) and a large side window (11) for inserting and removing the coffee measure (8) from within the same.

[0023] Now then, based upon this basic conventional construction, the system disclosed herein is primarily characterised in that the filter holder (9) is internally fitted with a plurality of equiangularly arranged radial bolts (12), preferably three, playing directly or fitted with sheaves or friction bushes within respective spiral slots (13) operatively made on the wall of the fixed support (2), wherein when the filter holder (9) is made to turn, by moving the handle (10) sideways, upon the bolts (12) moving along the slots (13), the filter holder travels axially and consequently moves towards or away from the filter (7) relative to the ring (3) on the fixed support (2), a gasket (14) being established between said elements to ensure that they are sealed.

[0024] In accordance with the above description and starting at a limiting position in which the bolts (12) lie at the lower end of the slots (13) and in which the window (11) is directly accessible, a coffee measure (8) may be inserted within the filter holder (9), obviously after removing the used measure, and by turning the handle (10) sideways the filter holder (9) gradually moves up to a limiting position in which the filter (7) adapts to the ring (3) on the fixed support (2) with said gasket (14) in between.

[0025] In order for this uppermost position to be stable, with reference particularly to figure 1, the slots (13) have been provided with a far less inclined near-horizontal terminal sector (13') where the "ramp" effect urging the filter holder to turn itself in the opposite direction disappears.

[0026] Furthermore, and with reference to the figures, the filter holder includes a number of elongate windows (17) which enable any type of measure to be used, indeed those in which the filter paper is square in shape, for in such case the corners of the filter paper will project through said windows (17).

[0027] In addition, the middle ring can include a device for removing the measure which, in the embodiment shown in the figures, consists of a finger or thruster (18) provided with an enlargement or head (20) actuated by a spring (19) permanently biasing the finger (18) down, in such a way that its head (20) constantly pushes the coffee measure down, thereby preventing it from sticking to the middle ring (3) on the fixed support (2).

[0028] The finger or thruster (18) is fitted in a central bore (22) of the middle ring (3) by means of a nut (21) and may travel vertically relative to the ring in such a way that the spring (19) action causes the head (20) of the finger (18) to lie at a position below the lower edge of the ring, thereby pushing the measure down, whereas upon the filter holder being actuated to drive it up to the upper position, the measure itself causes the finger (18) to retract, to be housed within the middle ring (3).

[0029] It need finally only be added that the fixed support (2) is guarded and ornamentally capped by an enveloping housing (15) which is screwed (16) or otherwise conventionally fixed to the actual support (2), concealing it.

## Claims

1. A coffee maker filter holder system, particularly for "espresso" type coffee makers working with a replaceable coffee measure (8) duly housed within a filter paper wrap, the coffee maker filter holder system comprising a fixed support (2) directly or indirectly attached to a hot water-supplying reservoir, which is provided with an extension (1) flowing into the filter (7), and a filter holder (9), wherein the replaceable coffee measure (8) is inserted, **characterised in that** the filter holder (9) is capable of travelling vertically within the fixed support (2), and has a large side window (11) for the coffee measure (8) to be inserted and removed and a number of elongate windows (17) which allow any type of coffee measure (8) to be used, said filter holder (9) being fitted on its inner surface with a plurality of equian-  
gularly arranged bolts (12), preferably three, with associated respective spiral slots (13) operatively established on the wall of the fixed support (2), wherein a manual turning movement supplied to the filter holder (9) through its fitted handle (10) causes the same to travel axially towards or away from the hot water outlet extension (1).
2. A coffee maker filter holder system, as in claim 1, **characterised in that** the spiral slots (13) of the fixed support (2) have a far less inclined near-hor-  
izontal top end sector (13') to establish a stable po-  
sition of the filter holder in its uppermost position, wherein the filter (7), with the assistance of a sealing gasket (14), is sealed to the inner ring (3), acting as  
connecting means to the outlet (5) from the lower reservoir extension (1).
3. A coffee maker filter holder system, as in preceding claims, **characterised in that** the bolts (12) are ca-  
pable of acting directly on the slots (13) or may be provided with bushes or sheaves enhancing their sliding.
4. A coffee maker filter holder system, as in preceding claims, **characterised in that** the fixed support in-  
cludes a device for removing the measure, consist-  
ing of a finger or thruster (18) fitted with an enlarged end or head (20), actuated by a spring (19), which device is mounted to travel vertically in a central bore (22) of the middle ring (3), thereby for the end or head (20) to act on the measure due to the spring bias, pushing it down and preventing it from sticking

to the middle ring (3).

5. A coffee maker filter holder system, as in preceding claims, **characterised in that** an enveloping hous-  
ing (15) is screwed (16) or otherwise fixed as a guard and ornamental cap to the fixed support (2), concealing the same.

## Patentansprüche

1. Haltevorrichtung für einen Filter einer Kaffeema-  
schine, speziell für "Espresso"-Kaffeemaschinen,  
die mit einer austauschbaren, in einem Filterpapier-  
paket verpackten Portion Kaffeepulver (8) be-  
schickt werden, wobei die Haltevorrichtung für Kaf-  
feemaschinen beinhaltet eine direkt oder indirekt  
mit einem Heißwasserbehälter, der über eine Er-  
weiterung (1) für den Wasseraufguss auf den Filter  
(7) verfügt, verbundene fest angebrachte Aufnahme  
(2) und eine Haltevorrichtung (9) zur Einführung  
der austauschbaren Portion Kaffeepulver (8). be-  
nannt, weil sich die Haltevorrichtung (9) vertikal in-  
nerhalb der fest angebrachten Aufnahme (2) bewe-  
gen kann und ein breites Seitenfenster (11) zum  
Einführen und Herausnehmen der Portion Kaffee-  
pulver (8) und eine Reihe längliche Fenster (17), die  
den Gebrauch beliebiger Portionsarten ermögli-  
chen, besitzt, wobei die Haltevorrichtung an ihrer  
Innenfläche über eine Mehrzahl, vorzugsweise drei,  
gleichwinklig verteilte Stifte mit ihnen entspre-  
chenden, einsatzfähig an der Wand der fest ange-  
brachten Aufnahme verlaufenden Spiralnute (13)  
verfügt, so dass die über manuelle Betätigung des  
Stiels (10) in Gang gesetzte Drehbewegung der  
Haltevorrichtung (9) eine axiale Bewegung dersel-  
ben in Annäherungs- oder Entfernungsrichtung be-  
züglich der Erweiterung (1) der Heißwasserauslei-  
tung auslöst.
2. Haltevorrichtung für einen Filter einer Kaffeema-  
schine gemäß Patentanspruch 1, benannt, weil die  
Spiralnute (13) der fest angebrachten Aufnahme (2)  
einen oberen Endabschnitt (13') aufweisen, der we-  
niger geneigt ist und sich der Waagerechten annä-  
hert, zur Gewährleistung eines stabilen Positionie-  
rens der Haltevorrichtung in Grenzsituation über  
derselben, in der sich der Filter (7) in Zusammen-  
wirkung mit einer Dichtung (14) dicht an den Innen-  
ring ankoppelt, der als Verbindungsglied zur Aus-  
leitung (5) der unteren Erweiterung (1) des Behäl-  
ters fungiert.
3. Haltevorrichtung für einen Filter einer Kaffeema-  
schine gemäß vorher gehender Patentansprüche,  
benannt, weil die Stifte (12) im Stande sind, direkt  
auf die Nute (13) einzuwirken, oder mit Büchsen  
oder Rollen versehen sind, die ihr Gleiten verbes-

sern.

4. Haltevorrichtung für einen Filter einer Kaffeemaschine gemäß vorher gehender Patentansprüche, benannt, weil die fest angebrachte Aufnahme über einen Portionsabscheideapparat verfügt, der aus einem Finger oder Stößel (18) mit einem ausgeweiteten Ende oder Kopfstück (20) besteht, auf den eine Feder (19) einwirkt, wobei der Apparat mit vertikaler Bewegungsmöglichkeit in eine zentrale Öffnung (22) des Zwischenrings so montiert wird, dass durch die Wirkung der Feder das Kopfstück (20) die Portion nach unten drückt und verhindert, dass sie am Zwischenring (3) kleben bleibt.
5. Haltevorrichtung für einen Filter einer Kaffeemaschine gemäß vorher gehender Patentansprüche, benannt, weil an der fest angebrachten Aufnahme (2) zu ihrem Schutz und ihrer Verschönerung mittels Schrauben (16) oder anderer beliebiger Mittel ein Gehäuse (15) befestigt wird, das sie verdeckt.

#### Revendications

1. Dispositif pour tenir un filtre dans une machine à café, en particulier pour des machines à café du type «expresso» qui fonctionnent avec une dose de café remplaçable (8) dûment logée à l'intérieur d'une enveloppe de papier-filtre, le dispositif pour tenir un filtre dans une machine à café comprenant un support fixe (2) directement ou indirectement solidarisé à un réservoir d'alimentation d'eau chaude, pourvu d'une extension (1) d'écoulement sur le filtre (7), et un porte-filtre (9) où l'on introduit la dose de café remplaçable (8), **caractérisé en ce que** le porte-filtre (9) peut être déplacé verticalement entre le support fixe (2) et qu'il a une large ouverture latérale (11) pour l'introduction et l'extraction de la dose de café (8) et une série d'ouvertures allongées (17) permettant l'utilisation de tout type de dose de café (8), ce porte-filtre (9) incorpore sur sa surface interne plusieurs boulons (12), de préférence au nombre de trois répartis à équiangles, dont sont complémentaires les rainures hélicoïdales (13) respectives établies de façon opératoire sur la paroi du support fixe, de sorte que le mouvement giratoire manuel donné au porte-filtre (9), par l'intermédiaire de son manche (10) provoque son déplacement axial pour se rapprocher ou s'éloigner de l'extension (1) d'écoulement d'eau chaude.
2. Dispositif pour tenir un filtre dans une machine à café, selon la revendication 10, **caractérisé en ce que** les rainures hélicoïdales (13) du support fixe (2) présentent un tronçon terminal supérieur (13') considérablement moins incliné, presque horizontal, pour établir un positionnement stable du porte-

filtre lorsqu'il se trouve dans une situation limite supérieure, dans laquelle le filtre (7), avec l'aide d'un joint d'étanchéité (14), s'accouple de façon étanche à l'anneau intérieur (3) qui agit comme moyen de raccordement à la sortie (5) de l'extension inférieure (1) du réservoir.

3. Dispositif pour tenir un filtre dans une machine à café, selon les revendications précédentes, **caractérisé en ce que** les boulons (12) sont susceptibles d'agir directement dans les rainures (13) ou d'être dotés de douilles ou réas améliorant leur coulissement.
4. Dispositif pour tenir un filtre dans une machine à café, selon les revendications précédentes, **caractérisé en ce que** le support fixe incorpore un dispositif d'extraction de la dose, composé d'un doigt ou poussoir (18), doté d'une extrémité élargie ou tête (20), sur lequel agit un ressort (19), dispositif qui est monté, avec possibilité de déplacement vertical, sur un orifice central (22) de l'anneau intermédiaire (3) de sorte que, sur l'action du ressort, l'extrémité ou tête (20) agisse sur la dose en la poussant vers le bas et en l'empêchant de s'adhérer à l'anneau intermédiaire.
5. Dispositif pour tenir un filtre dans une machine à café, selon les revendications précédentes, **caractérisé en ce qu'est** fixée au support fixe (2), comme protecteur et enjoliveur de ce dernier, par des vis ou tout autre moyen, une carcasse enveloppante (15) qui le cache.


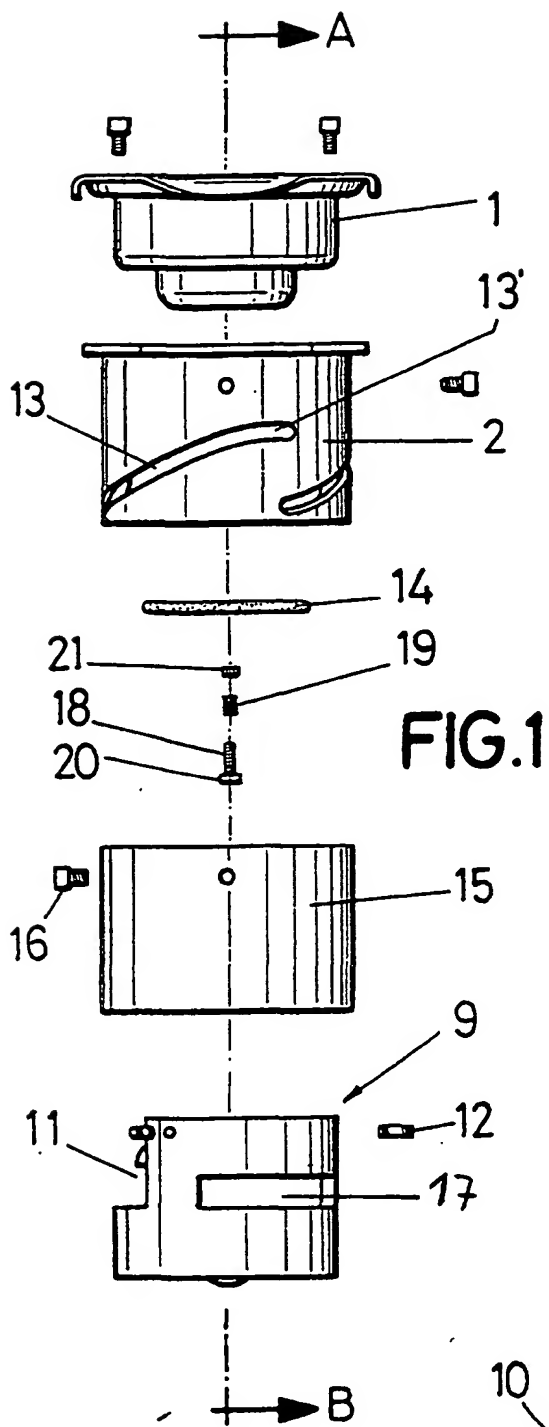


FIG.1

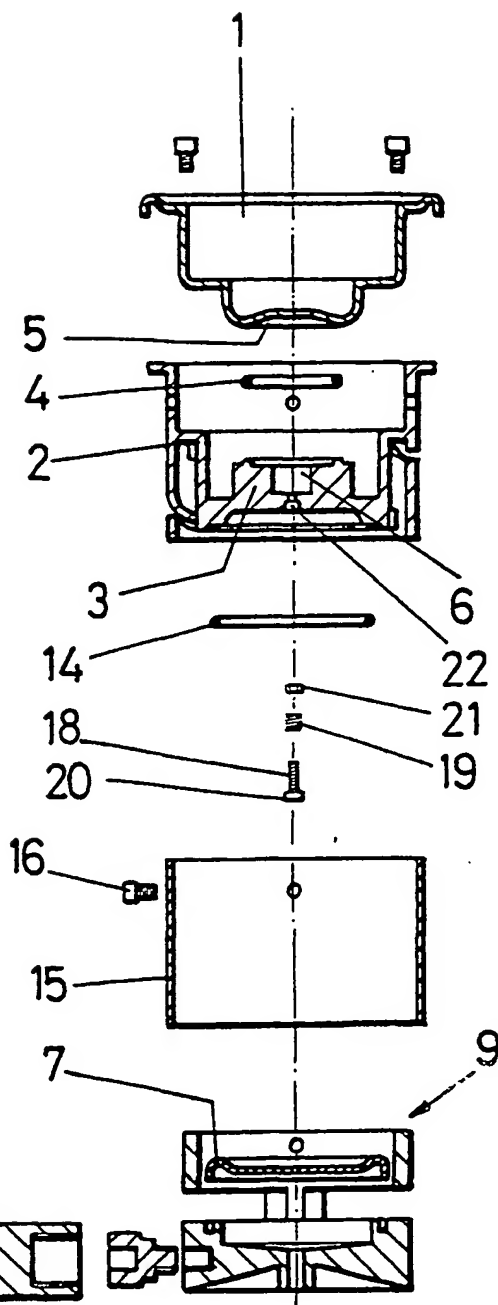

A-B  
FIG.2

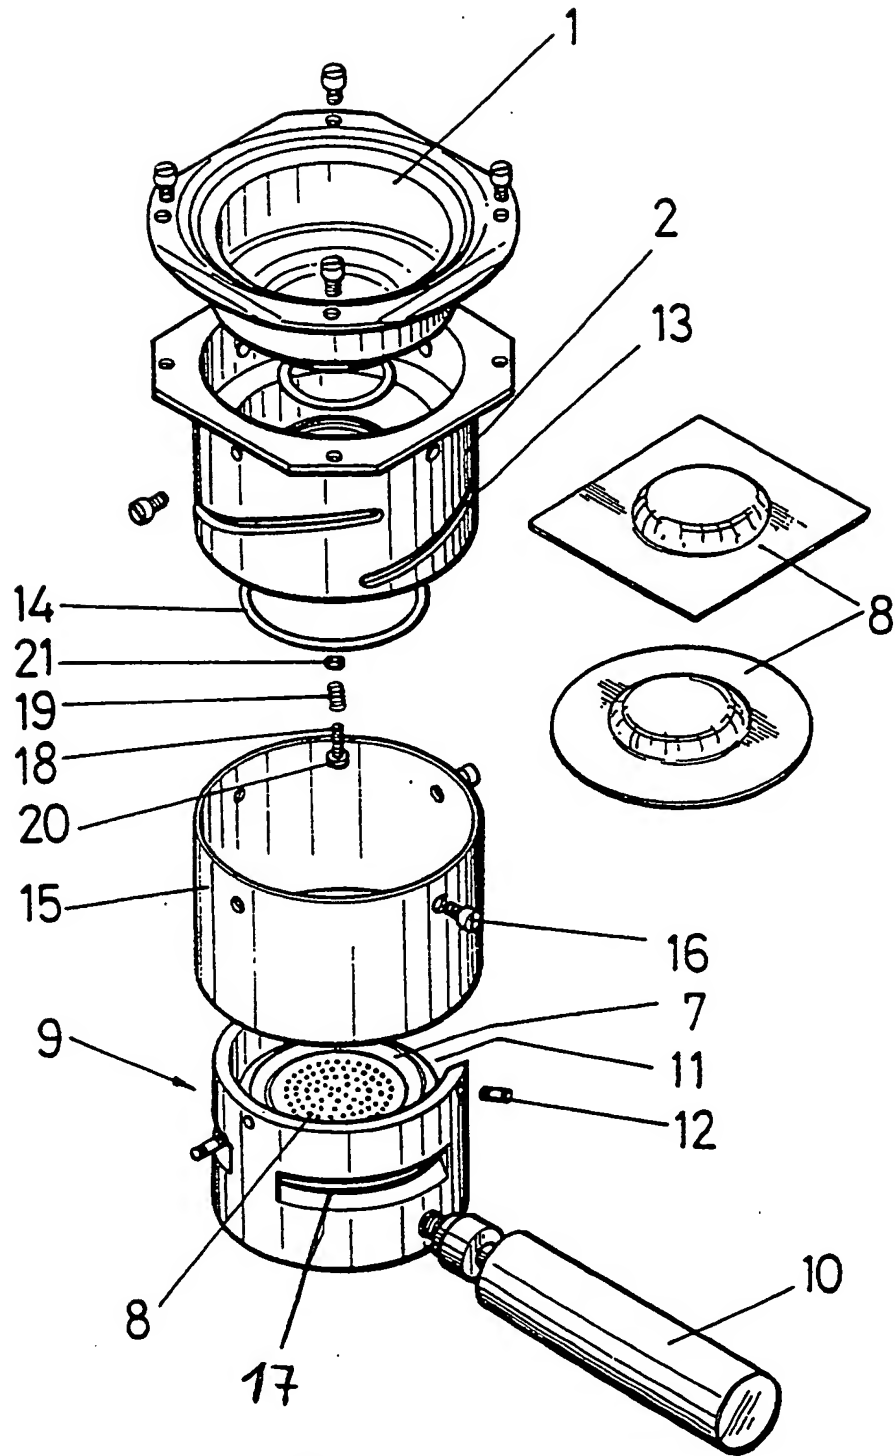


FIG.3